



Toll Free: 87 PERMATEX
(877-376-2839)

10 Columbus Blvd., Hartford,
Connecticut 06106

6875 Parkland Boulevard, Solon
Ohio 44139

Technical Data Sheet

Permatex® Penetrating Grade Threadlocker Green

AAM Revised 06/14

PRODUCT DESCRIPTION

Permatex® Penetrating Grade Threadlocker Green is a **medium strength** anaerobic threadlocking material that cures between engaged threads to form a unitized assembly that resists virtually all leakage, shock and vibration. The product is a single component, anaerobic liquid that cures in the absence of air and when confined between close fitting metal surfaces. Because of its low viscosity and capillary action, the product *wicks* between engaged threads and eliminates the need to disassemble, apply product and then reassemble. The high prevailing torque provides vibration resistance to adjustment screws. Ideal for all threaded engagements less than or equal to 1/2 inch in diameter. The product can also fill porosity in welds, castings and powder metal parts. Excellent chemical resistance with a temperature resistance range of -54°C to 150°C (-65°F to 300°F). OEM Specified. NSF White Book registered.



Nonfood Compounds
Program Listed (P1)
(134525)

PRODUCT BENEFITS

Improved Reliability

- Eliminates vibration issues
- Seals against leakage
- Prevents rusting of threads
- Cures without cracking or shrinking
- Can be adjusted or disassembled
- Seals porosity

Easy Application

- No mixing
- No disassembly
- No curing outside of joint

TYPICAL APPLICATIONS

Prevents loosening and leakage of pre-assembled threaded fasteners and as a porosity sealant. Particularly suitable for applications such as:

- Pre-assembled threaded assemblies
- Adjustment screws
- Seal porous welds
- Seal porosity on brake unit housings
- Seal brazed joints in cooling systems


DIRECTIONS FOR USE

For Pre-assembled Threaded Parts with Thru Hole

1. Prior to assembly, clean all threads (Bolt and Hole) with a

cleaning solvent such as Permatex® Brake and Parts Cleaner and allow to dry.


2. **For Thru Holes**, apply several drops of product at screw and body juncture as shown:

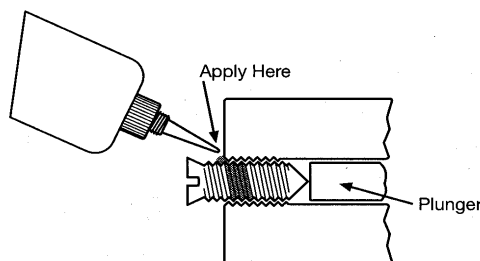

Avoid touching the bottle tip to the metal surface.

Not recommended for pre-assembled threads in a blind hole.

3. **For Porosity Sealing**, clean area and apply localized heat to the area to approximately 121°C (250°F). Allow to cool to approximately 85°C (185°F) and apply the product.

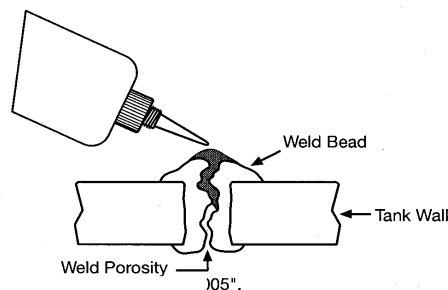

Maximum porosity sealed: .005".

For Cleanup

1. Residual liquid films and/or fillets outside the joint are readily soluble in Permatex® Brake and Parts Cleaner.
2. Cured product can be removed with a combination of soaking in Permatex® Gasket Remover and mechanical abrasion such as a wire brush.

For Disassembly

1. Remove with standard hand tools.
2. In the rare instance where hand tools do not work, because of excessive engagement length, apply localized heat to nut or bolt to approximately 260°C (500°F). Disassemble while hot.

For Reassembly

1. Remove loose product from nut and bolt.
2. Apply primer to all threads, regardless of metal type.
3. Assemble and tighten as usual.

NOT FOR PRODUCT SPECIFICATIONS.

THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.

PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.
PERMATEX, INC., HARTFORD SQUARE NORTH, 10 COLUMBUS BOULEVARD, HARTFORD, CT 06106 PHONE - (1-87PERMATEX)

PROPERTIES OF UNCURED MATERIAL

	Typical Value
Chemical Type	Anaerobic Dimethacrylate Ester
Appearance	Green Fluorescent Liquid
Specific Gravity, g/ml	1.08
Viscosity @ 25°C, mPa.s (cP)	20 - 55
Flash Point (TCC), °C (°F)	>93 (>200)

TYPICAL CURING PERFORMANCE

Cure speed vs. substrate

The rate of cure will depend on the material used. Permatex® Penetrating Grade Threadlocker Green will react faster and stronger with **Active Metals**. However, **Inactive Metals** will require the use of a primer (Surface Prep) to obtain maximum strength and cure speed at room temperature.

Active Metals	Inactive Metals
Soft Steel Iron	Bright Platings
Copper	Anodized Surfaces
Brass	Titanium
Manganese	Zinc
Bronze	Pure Aluminum
Nickel	Stainless Steel
Aluminum Alloy	Cadmium

Cure speed vs. temperature

The rate of cure will depend on the ambient temperature. **Full cure** is attainable in 24 hours at room temperature, 22°C (72°F), or 1 hour at 93°C (200°F).

Cure speed vs. primer

To shorten cure time or if an inactive surface is present, applying a primer (Surface Prep) to the surface will improve cure speed. A 3/8-16 steel nut and bolt assembly will fixture in 3 minutes using a primer, while fixturing will occur in 20 minutes without a primer. Full cure in 24 hours for both procedures.

PERFORMANCE OF CURED MATERIAL

(After 24 hr at 72°F on 3/8-16 steel Grade 8 Nuts and Grade 5 bolts)

	Typical Value
Breakaway Torque, Nm, (in.lbs)	7 (65)
Prevail Torque, Nm (in.lbs)	25 (225)

Where Breakaway Torque is the force required to initiate the fastener movement and Prevail Torque is the force required to disassemble the fastener once Breakaway Torque has occurred.

TYPICAL ENVIRONMENTAL RESISTANCE

Temperature Resistance

Product temperature range from -54°C to 150°C (-65°F to 300°F). The Breakaway and Prevailing Torque values decrease as temperature increases, however the assembly remains effective against vibration and leakage.

Chemical / Solvent Resistance

The product retains effective properties in contact with automotive fluids, such as motor oil, gasoline, brake fluids, transmission fluids, alcohol and antifreeze solutions.

GENERAL INFORMATION

Permatex is a trademark of Permatex, Inc. © 2014 Permatex, Inc. All rights reserved

Technical Data Sheet Penetrating Grade Threadlocker Green
This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

This product is not normally recommended for use on plastics (particularly thermoplastic materials where stress cracking of the plastic could result). It is recommended to confirm compatibility of the product with such substrates.

ORDERING INFORMATION

Part Number	Container Size
29000	6 ml tube, carded
29040	36 ml bottle, carded

OEM Interchange

Manufacture	OEM Specifications Numbers	
Auto Latina	ESEM4G203A	
Ford	SSM-4G-9520-A	WSK-M2G351-A1
	ESF-M2G132-A	
GM	998 5306	
Isuzu	1-8844-6375-0	
Maxiun	0710109	
Scania	814281	
Valmet	078723020	
Volvo	591264	

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° and 28°C (46° and 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **ITW Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.